

# Net Impacts Analysis for the Republican River Basin

November 7, 2025



## Table of Contents

Purpose .....	1
Methods .....	1
Analyses .....	2
N-CORPE Augmentation Project .....	2
Rock Creek Augmentation Project .....	5

## Purpose

This report contains DWEE’s analysis of the net impacts to the Republican River Basin of augmentation pumping for the Nebraska Cooperative Republican Platte Enhancement project (N-CORPE) and Rock Creek Augmentation project. DWEE’s net impacts analysis fulfills a requirement of the IMPs jointly developed by DWEE and Upper Republican, Middle Republican, and Lower Republican NRDs. The IMPs state that “...[DWEE] will annually evaluate whether offsets are necessary to mitigate new net depletions resulting from augmentation pumping or other management actions.”

## Methods

As part of implementation of each augmentation project, the project operators (i.e., an NRD or an interlocal cooperative agreement consisting of multiple NRDs, as described below for each project) purchased land that had previously been used for irrigation, including the groundwater rights for that land. This evaluation provides the most recent estimate of the difference in depletions from the historical operation of each augmentation project and depletions from a simulated continuation of irrigation pumping on the purchased land.

Augmentation projects are evaluated for their effect to streamflow quantity in the Republican River Basin in two ways: the increased Republican River Basin streamflow through direct addition of pumped groundwater and the impacts to baseflows (groundwater discharge to the stream) from changes in groundwater pumping, with the sum of these being the net streamflow impacts. The amount of direct groundwater addition to Republican River Basin streamflow is metered by the NRDs and reported to DWEE. The impacts to baseflow are determined by comparing model-estimated impacts from two simulations:

- The historical simulation that includes all augmentation pumping but ceases irrigation operations once the project was initiated, and
- An estimated irrigation simulation where an estimation of net irrigation pumping for lands purchased through the development of the augmentation project is included and augmentation

pumping from the beginning of the project through 2025 is excluded. “Net irrigation pumping” in this simulation refers to estimated irrigation pumping and the associated estimated change in recharge.

The difference between the scenarios is that for the period after the augmentation projects were initiated, the historical scenario uses actual augmentation pumping data, whereas the comparison simulation estimates the irrigation that would have occurred had the project lands continued to be used for irrigation.

Simulations were carried out using the RRCA groundwater model. All 2024 data are final at the time of this report. **The preliminary estimates for 2025 are not included in this year’s report but will be incorporated into next years report.**

## Analyses

### N-CORPE Augmentation Project

The Nebraska Cooperative Republican Platte Enhancement project (N-CORPE) is operated through an interlocal cooperative agreement formed in 2012 by Upper Republican NRD, Middle Republican NRD, Lower Republican NRD, and Twin Platte NRD. The N-CORPE augmentation project was operational each year from its first year through 2017 to offset depletions for Compact compliance; 2018 and 2019 operations were for maintenance purposes; and 2020 through 2024 operations primarily utilized the project’s north pipeline to the Platte River for part of Twin Platte NRD’s integrated management plan requirements. Cumulative augmentation for the N-CORPE project is shown in Figure 1. The difference between modeled CBCU (baseflow depletions) from N-CORPE augmentation pumping and modeled CBCU from estimated net irrigation pumping on the N-CORPE purchased acres, had those acres been used for irrigation, is shown in Figure 2.

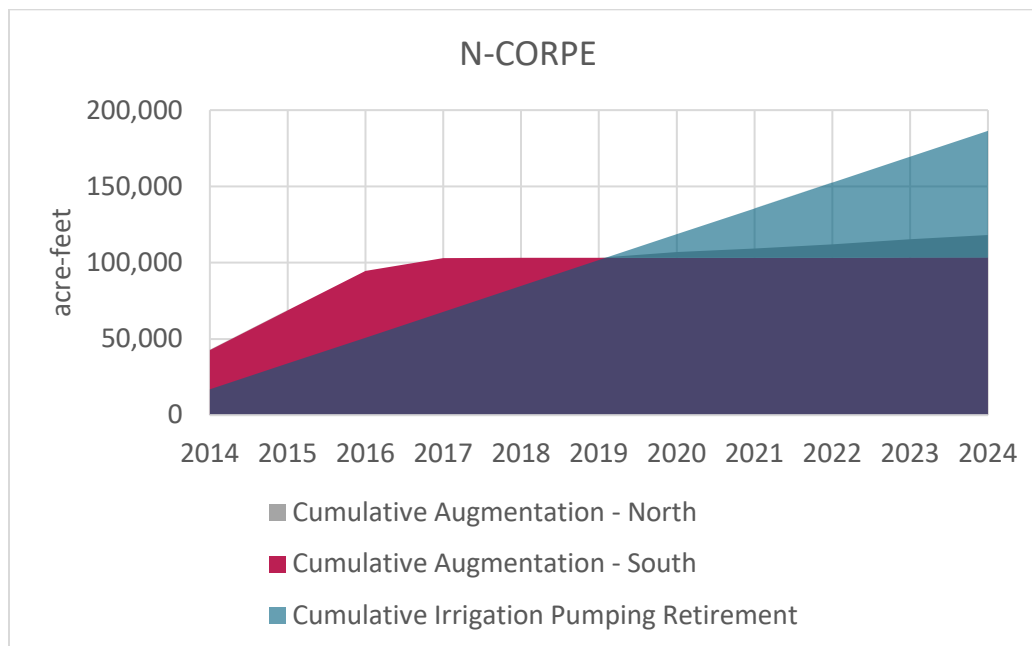


Figure 1: Cumulative water use for augmentation and estimated irrigation pumping on acres purchased under the N-CORPE Augmentation Project.

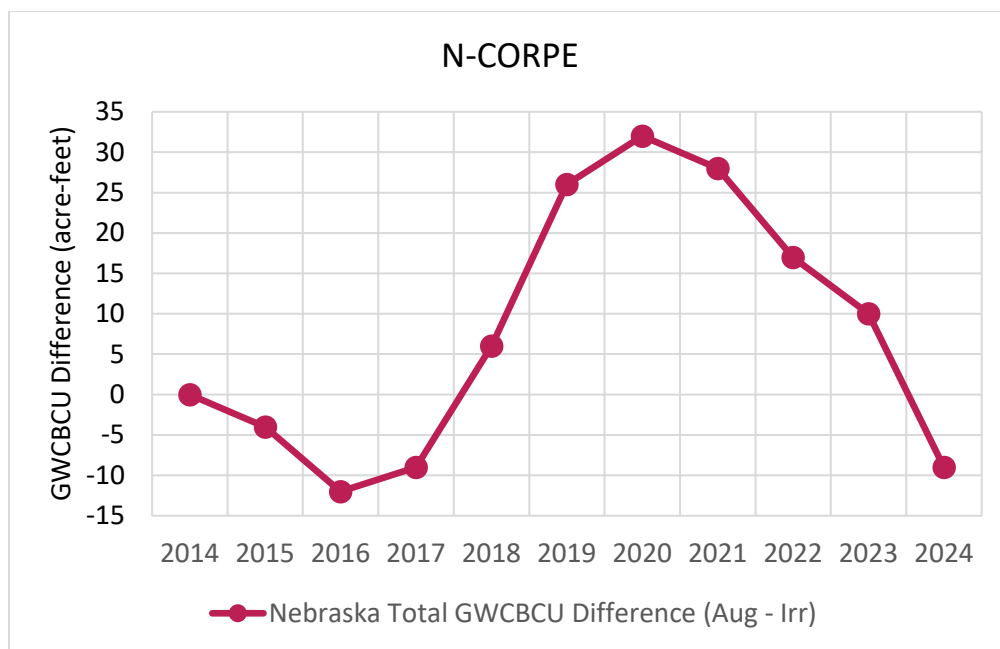


Figure 2: The difference between modeled CBCU (depletions) from N-CORPE Augmentation pumping and modeled CBCU from estimated net irrigation pumping on the N-CORPE purchased acres had those acres been used for irrigation. In this figure, a positive groundwater CBCU (GWCBCU) difference indicates that modeled depletions from augmentation were greater than modeled depletions from estimated net irrigation pumping.

The evaluation of net depletive effects considers both the difference in depletions between the augmentation and estimated irrigation scenarios, described above, and the amount of streamflow added through augmentation to the Republican River Basin through the N-CORPE south pipeline for Compact compliance or maintenance purposes. Net depletive effects from 2014–2019 and 2023 operation were offset by augmentation pumping (for Compact or maintenance purposes) to the Republican River Basin through the N-CORPE south pipeline, so no additional offsets were needed for those years. N-CORPE does not have net depletive effects in 2024 (Figure 3).

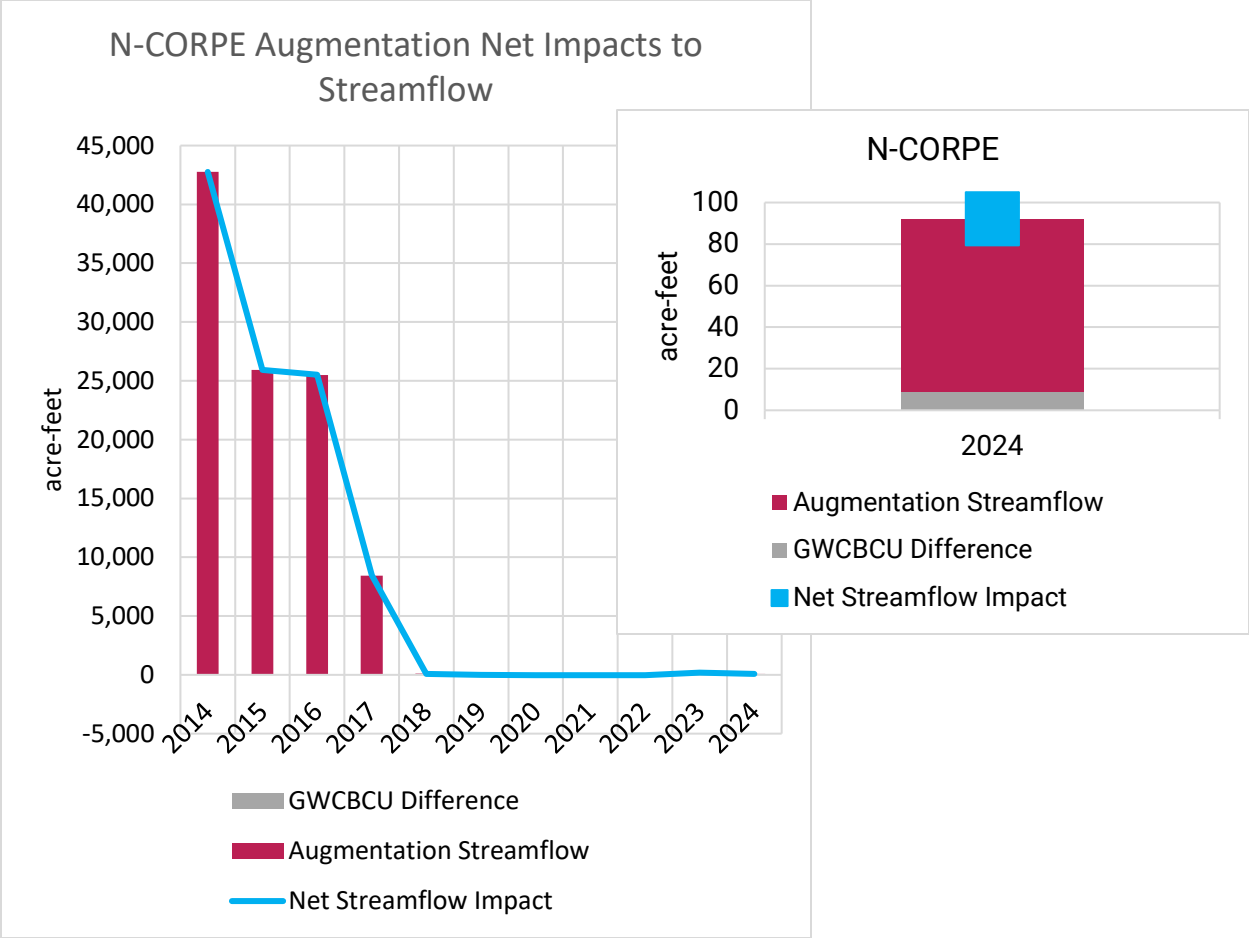


Figure 3: The net impacts to streamflow from the N-CORPE Augmentation Project. 2024 data are final as of this report. An inset is included to show a closeup of 2024. In this figure, a positive value indicates a net increase in streamflow due to N-CORPE operations, and a negative value indicates net depletions to streamflow. Because of this, the GWBCU Difference values in this chart are represented as the inverse of the GWBCU values in Figure 2. The Net Streamflow Impact is the sum of GWBCU Difference and Augmentation Streamflow.

## Rock Creek Augmentation Project

The Rock Creek augmentation project is operated by Upper Republican NRD. The Rock Creek augmentation project was operational each year from 2013 through 2017 to offset depletions for Compact compliance, and through 2024 for maintenance purposes. Cumulative augmentation for the Rock Creek project is shown in Figure 4, along with a cumulative estimation of irrigation pumping had the Rock Creek purchased acres continued to be used for augmentation. The difference between modeled CBCU (depletions) from Rock Creek augmentation pumping and modeled CBCU from estimated net irrigation pumping on the Rock Creek purchased acres, had those acres been used for irrigation, is shown in Figure 5.

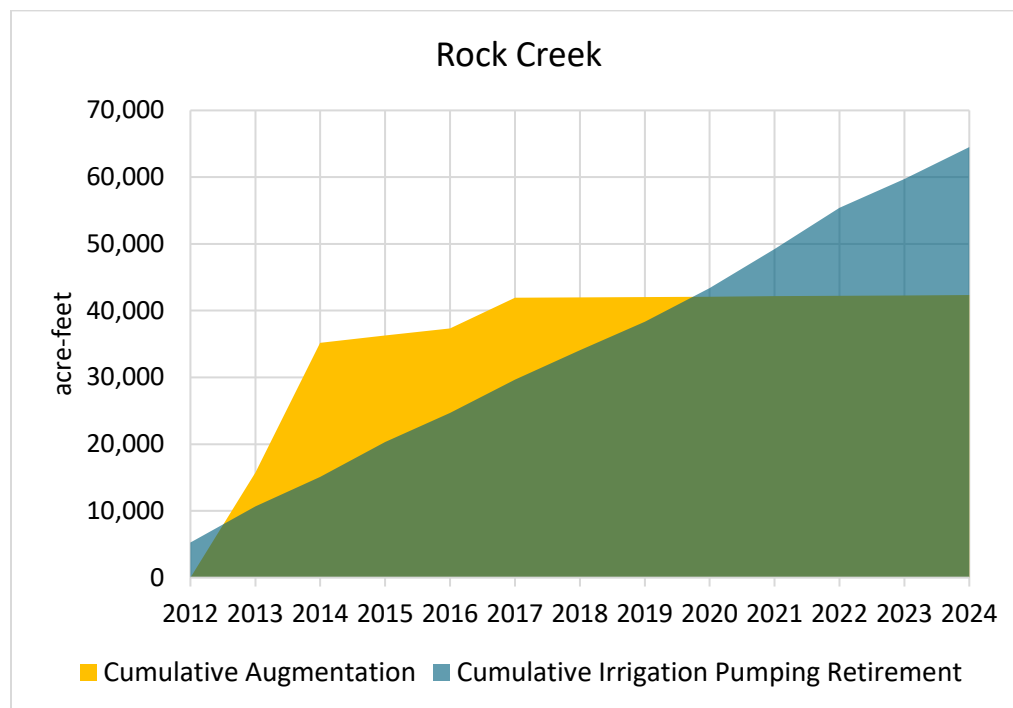


Figure 4: Cumulative water use for augmentation and estimated irrigation pumping on acres purchased under the Rock Creek Augmentation Project.

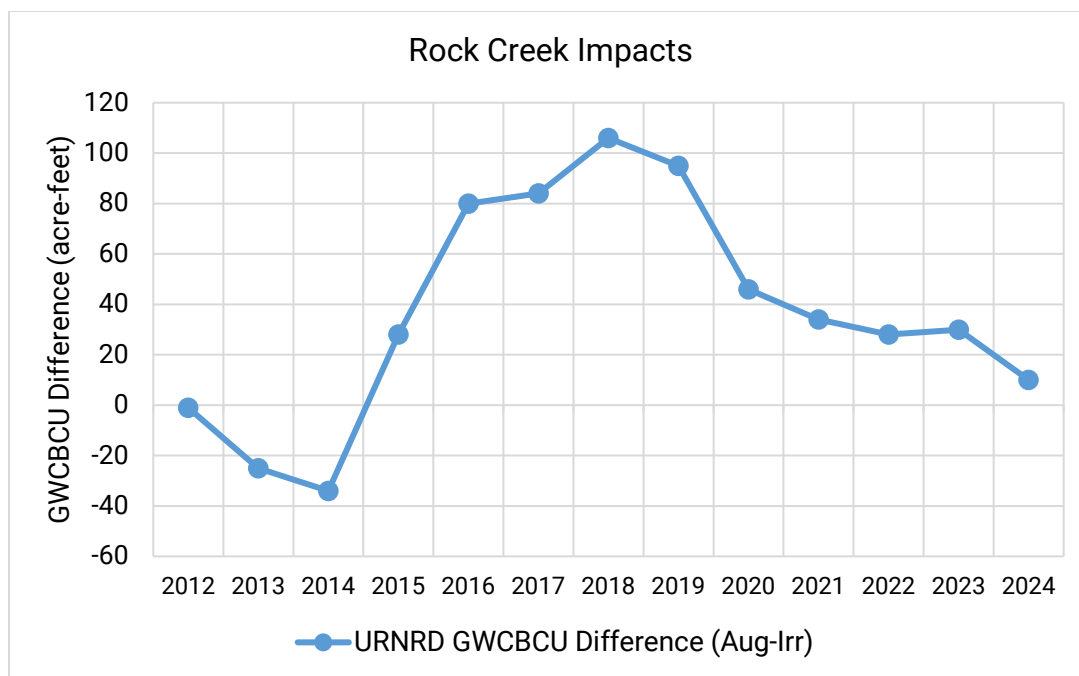


Figure 5. The difference between modeled CBCU (depletions) from Rock Creek Augmentation pumping and modeled CBCU from estimated net irrigation pumping on the Rock Creek purchased acres had those acres been used for irrigation. In this figure, a positive groundwater CBCU (GWCBCU) difference indicates that modeled depletions from augmentation were greater than modeled CBCU from estimated net irrigation pumping.

The evaluation of net depletive effects considers both the difference in depletions between the augmentation and estimated irrigation scenarios, described above, and the amount of streamflow added through augmentation. Any net depletive effects through 2017 were offset by augmentation pumping in those years. Small net depletive effects of Rock Creek in 2020, 2021, 2022, 2023, and 2024 were offset by the pumping that occurred in those years for maintenance purposes.

Augmentation pumping alone did not fully offset augmentation pumping from Rock Creek in 2018 and 2019. A 2019 analysis by DWEE concluded that maintenance pumping plus temporary buyouts and permanent decertifications located either upstream of the Rock Creek confluence with the Republican River or near the eastern end of the Rock Creek subbasin provides a total offset that well exceeds the new depletions from previous Rock Creek augmentation pumping, mitigating any potential effects to downstream users. See *First Annual Report for the Republican River Basin-Wide Plan: Data and Progress Updates, 2014–2018* (February 2020) for details.

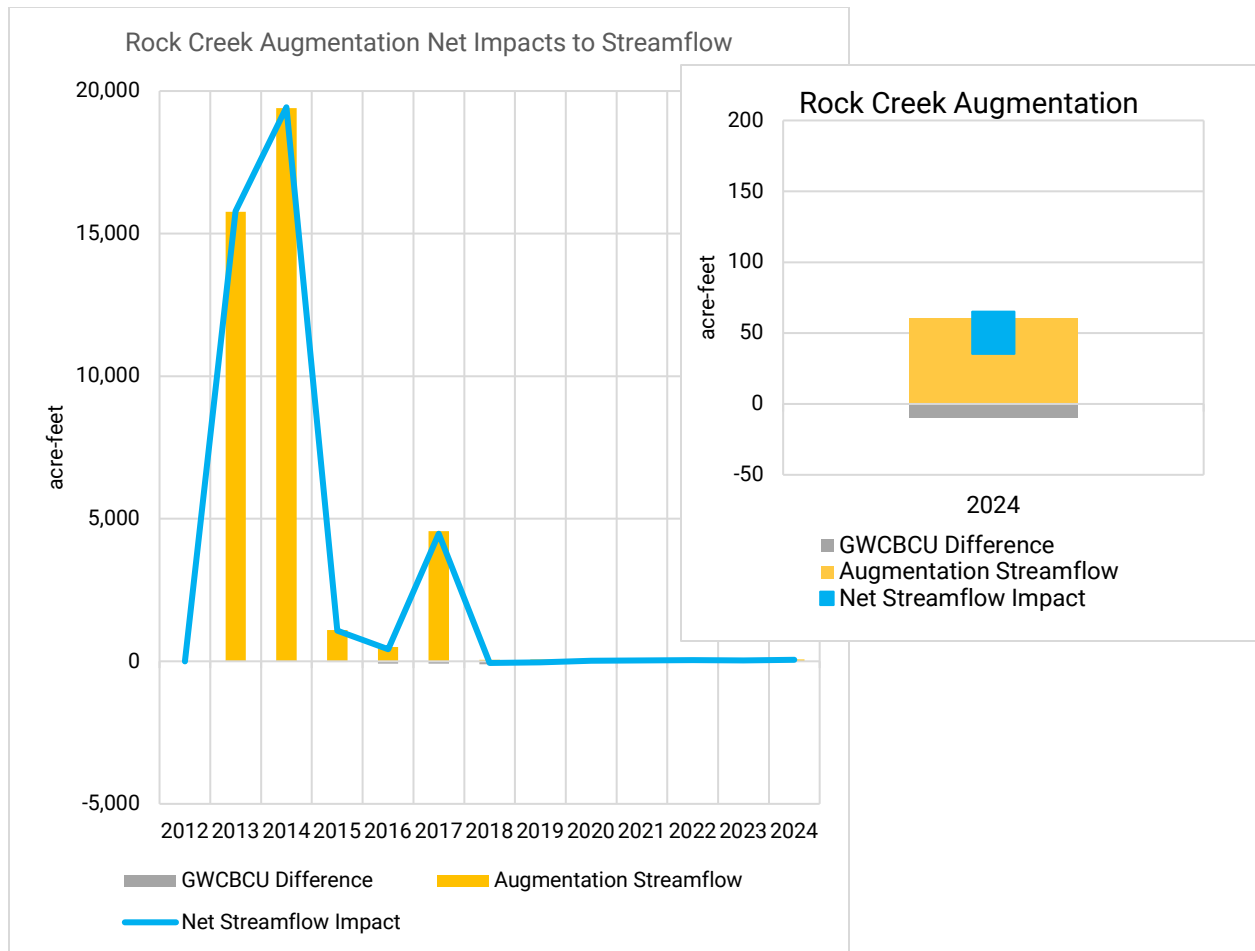


Figure 6: The net impacts to streamflow from the Rock Creek Augmentation Project. 2024 data are final as of this report. An inset is included to show a closeup of 2024. In this figure, a positive value indicates a net increase in streamflow due to Rock Creek project operations, and a negative value indicates net depletions to streamflow. Because of this, the GWCBCU Difference values in this chart are represented as the inverse of the GWCBCU values in Figure 5. The Net Streamflow Impact is the sum of GWCBCU Difference and Augmentation Streamflow.