

7.0 LOWER PLATTE RIVER BASIN

7.1 Summary

Based on the analysis of the sufficiency of the long-term surface water supply in the Lower Platte River Basin, the Department has reached a conclusion that the basin is not fully appropriated. The analysis of the lag effects from current development on the Lower Platte River Basin indicates a reduction in streamflows of 422 cfs upstream of Louisville; approximately 87 cfs of which occurs due to lag impacts upstream of North Bend. The analysis of the impacts of future development (including the lag depletions from current levels of development) on the Lower Platte River Basin based on current development trends indicates a reduction in streamflows of 541 cfs in 25 years upstream of Louisville, approximately 149 cfs of which occurs due to development upstream of North Bend. The analysis of future water supplies in the Lower Platte River Basin indicates that, if no additional constraints are placed on groundwater and surface water development, and reasonable projections are made in regard to the extent of future development, then the effects on the long-term water supply would not cause the basin to become fully appropriated in the future.

7.2 Basin Description

The Lower Platte River is defined as the reach of the Platte River from its confluence with the Loup River to its confluence with the Missouri River. The Lower Platte River Basin is defined as all surface areas that drain into the Lower Platte River, including those areas that drain into the Loup River and the Elkhorn River, and all aquifers that impact surface water flows of the basin (Figure 7-1). The total area of the Lower Platte River surface water basin is approximately 25,400 square miles, of which approximately 15,200 square miles are in the Loup River subbasin and approximately 7,000 square miles are in the Elkhorn River subbasin. Natural resources districts with significant area in the basin are the Lower Platte South NRD; the Lower Platte North NRD; the Upper Elkhorn NRD; the Lower Elkhorn NRD; the Upper Loup NRD; the Lower Loup NRD; and the Papio-Missouri River NRD.





Planning and Assistance Division

General Basin Map LOWER PLATTE RIVER SURFACE WATER BASIN



This map is intended to supply only general information concerning the matter stated in its title. Boundaries and the location of features portrayed on this map are not to be construed as legal boundaries or actual locations, and may change as additional or better data become available. User assumes all risks associated with interpretations of this map beyond its intended purpose.

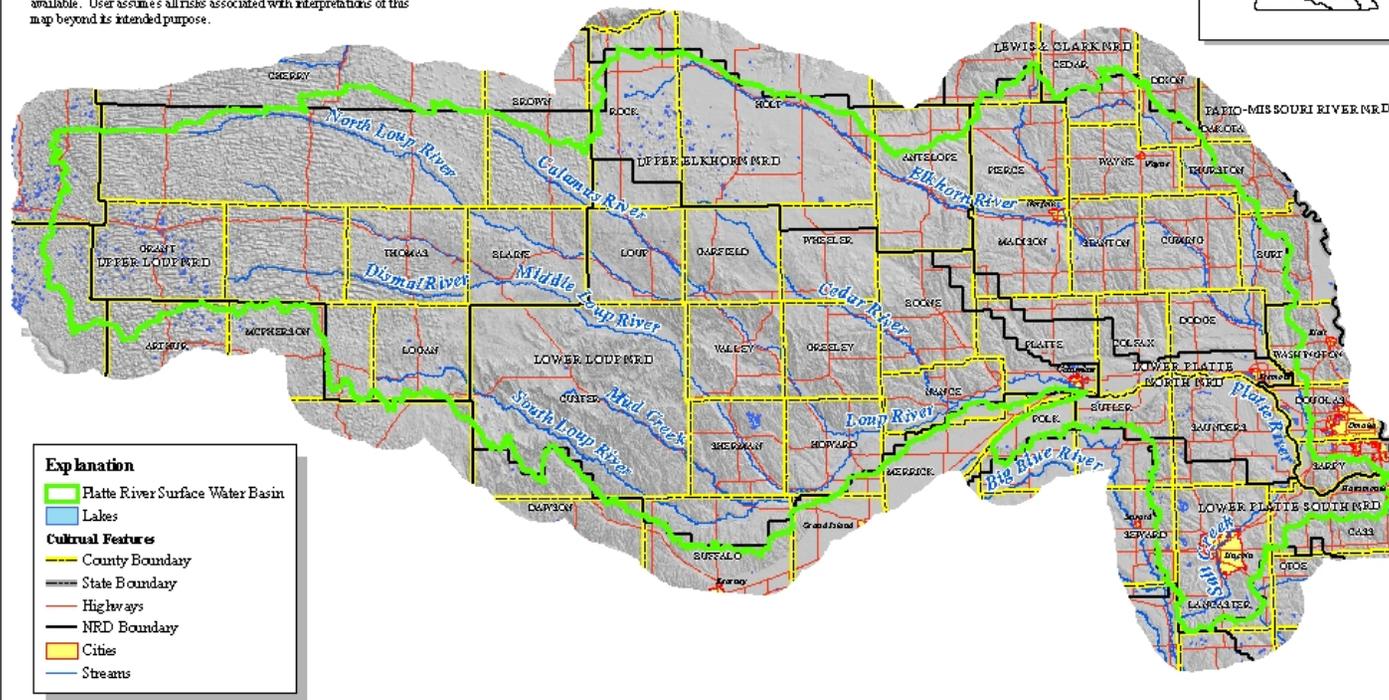

0 5 10 20 30 40 50
Miles

Base map produced by Kevin Schwartzman, April 27, 2006
Base map approved June 1, 2006
General basin map produced by Kevin Schwartzman, June 1, 2006

Figure 7-1. General basin map, Lower Platte River Basin.

7.2.1 Subbasin Relationships

When considering the Lower Platte River Basin, it is important to understand the relationship between the senior surface water appropriations and the junior surface water appropriations in the Loup and Elkhorn River subbasins with regard to appropriations in the downstream portion of the Lower Platte River Basin. In general, when a senior water right calls for water, all water rights upstream of the senior right will be shut off to get water to the senior appropriator. Starting with the most junior appropriators, the Department will shut off as many junior appropriators as necessary to provide water to the senior appropriator. For senior appropriations along the Lower Platte River, this includes junior appropriators in the Loup and Elkhorn subbasins, because those subbasins provide flows to the reaches of the Lower Platte River that require administration for senior appropriators.

The senior appropriations calling for water in the Lower Platte River Basin are the instream flow rights. The instream flow rights have a priority date of November 30, 1993, and, when these appropriations are not being fulfilled, all surface water appropriations junior to that priority date will be closed. The instream flow appropriations are measured at the North Bend gage and the Louisville gage, although the appropriations extend to the confluence with the Missouri River. When instream flow appropriations are not met at the North Bend gage, all junior surface water appropriations above that gage, including those in the Loup River Basin, are closed to diversion (Figure 7-2). When instream flow appropriations are not met at both the North Bend and the Louisville gages, all junior surface water appropriations above both gages, including those in both the Loup and Elkhorn River subbasins, are closed to diversion. In circumstances where the instream flow appropriation is being met at the North Bend gage but not at the Louisville gage, all junior appropriations above the Louisville gage, including those in both the Loup and Elkhorn River subbasins, are closed to diversion.

Administration for the instream flow rights did not begin until 1997 when the permits were actually issued. Therefore, to evaluate a 20-year record, the Department had to determine the number of days in which administration would have occurred if the instream flow rights had been in existence for the entire period of evaluation (1993-2012). Between 1993 and 2012, the

junior surface water appropriations above North Bend, including those in the Loup River subbasin, would have been closed due to the instream flow appropriations not being met during July and August (the 65 percent time period from the 65/85 rule) for a total of 465 days. The junior surface water appropriations downstream of North Bend but upstream of Louisville would have been closed due to the instream flow appropriation not being met during July and August for a total of 419 days.





Planning and Assistance Division

Study Areas LOWER PLATTE RIVER SURFACE WATER SUBBASINS



This map is intended to supply only general information concerning the matter stated in its title. Boundaries and the location of features portrayed on this map are not to be construed as legal boundaries or actual locations, and may change as additional or better data become available. User assumes all risks associated with interpretations of this map beyond its intended purpose.

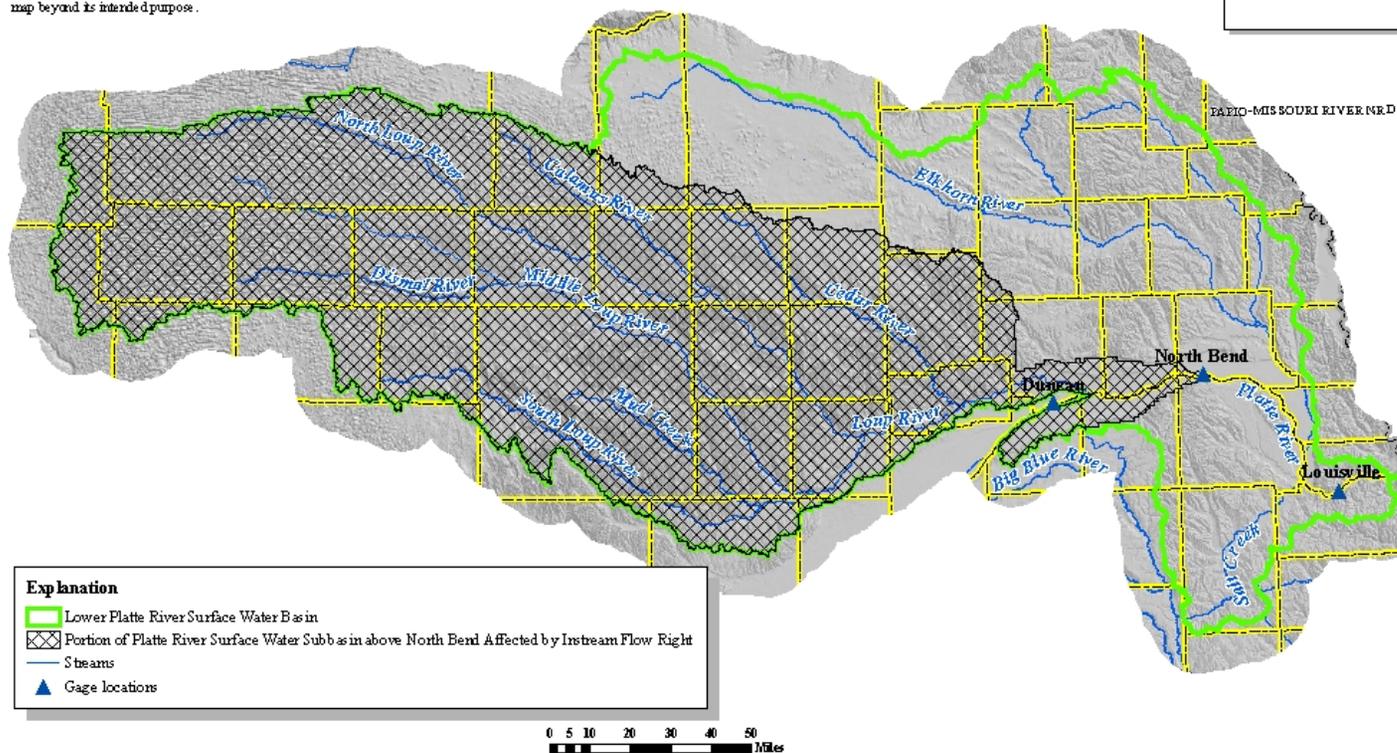

Base map produced by Kevin Schwatman, April 27, 2006
Base map approved June 1, 2006
Study Areas Revised By Shuhai Zheng, November 20, 2006

Figure 7-2. Map of the Platte River Basin highlighting the subbasin above the North Bend gage.

7.3 Nature and Extent of Water Use

7.3.1 Groundwater

Groundwater in the basin is used for a variety of purposes: domestic, industrial, livestock, irrigation, and other uses. A total of 46,497 groundwater wells had been registered within the basin as of December 31, 2012 (Department registered groundwater wells database) (Figure 7-3).

The locations of all active groundwater wells can be seen in Figure 7-4.

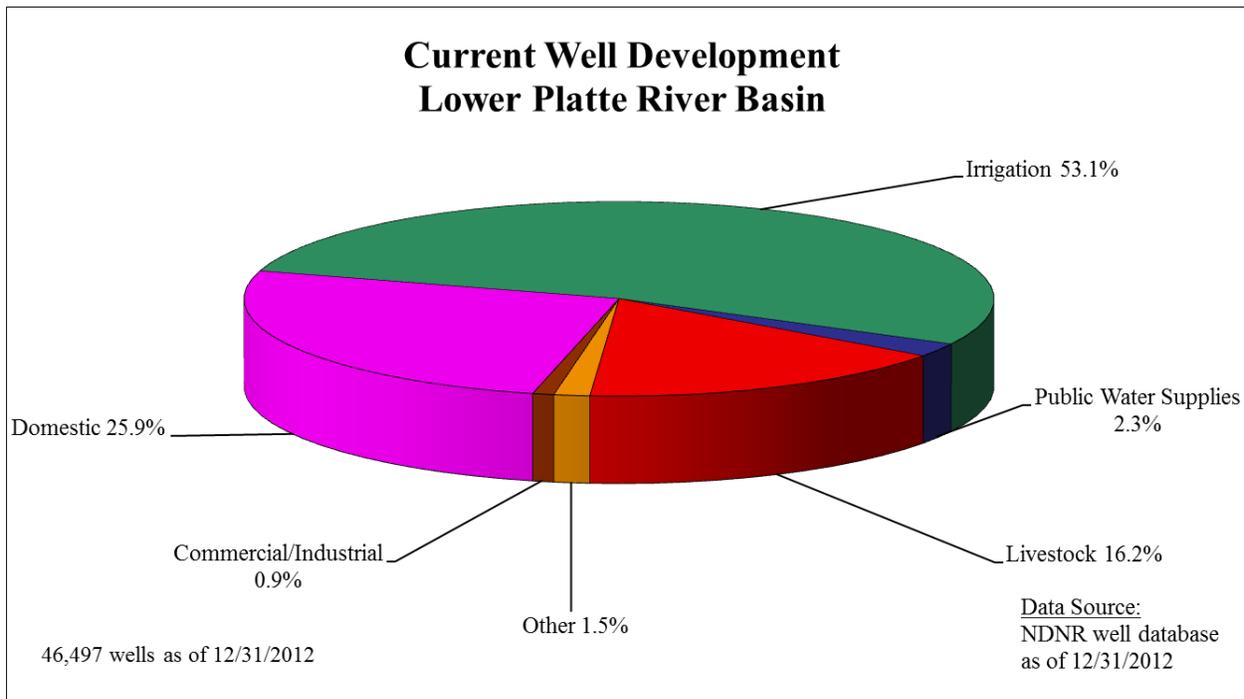


Figure 7-3. Current well development by number of registered wells, Lower Platte River Basin.





Planning and Assistance Division

Current Well Development LOWER PLATTE RIVER SURFACE WATER BASIN



This map is intended to supply only general information concerning the matter stated in its title. Boundaries and the location of features portrayed on this map are not to be construed as legal boundaries or actual locations, and may change as additional or better data become available. User assumes all risks associated with interpretations of this map beyond its intended purpose.

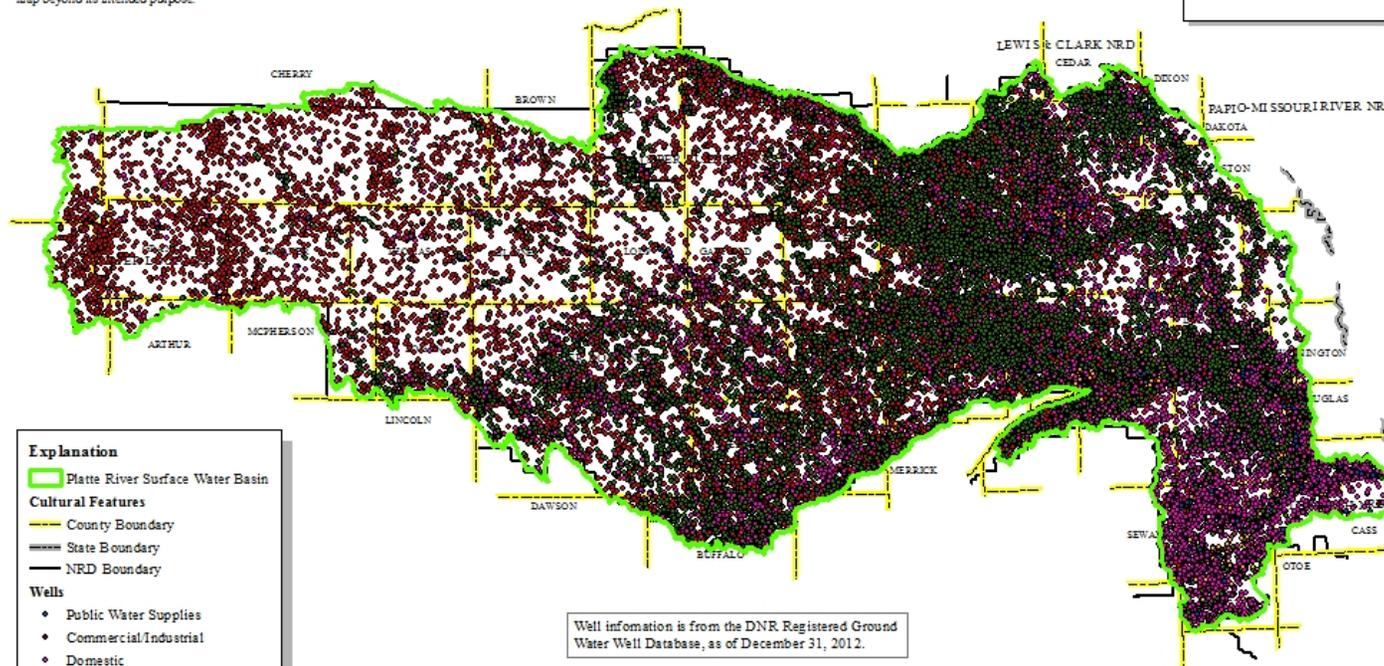

- Explanation**
- Platte River Surface Water Basin
- Cultural Features**
- County Boundary
 - State Boundary
 - NRD Boundary
- Wells**
- Public Water Supplies
 - Commercial/Industrial
 - Domestic
 - Livestock
 - Irrigation
 - Other

Well information is from the DNR Registered Ground Water Well Database, as of December 31, 2012.



Base map produced by Kevin Schwartman, April 27, 2006
Base map approved June 1, 2006
Wells map produced by Kevin Schwartman, December 6, 2013

Figure 7-4. Current well locations, Lower Platte River Basin.

7.3.2 Surface Water

As of December 31, 2012, 2,273 surface water appropriations were held in the basin, issued for a variety of uses (Figure 7-5). Most of the surface water appropriations are for irrigation use and tend to be located on the major streams. In addition, two instream flow appropriations are held in the basin. The instream flow appropriations are located on the Platte River and are measured at North Bend and Louisville. The first surface water appropriations in the basin were permitted in 1890, and development has continued through the present day. The approximate locations of the surface water diversion points are shown in Figure 7-6.



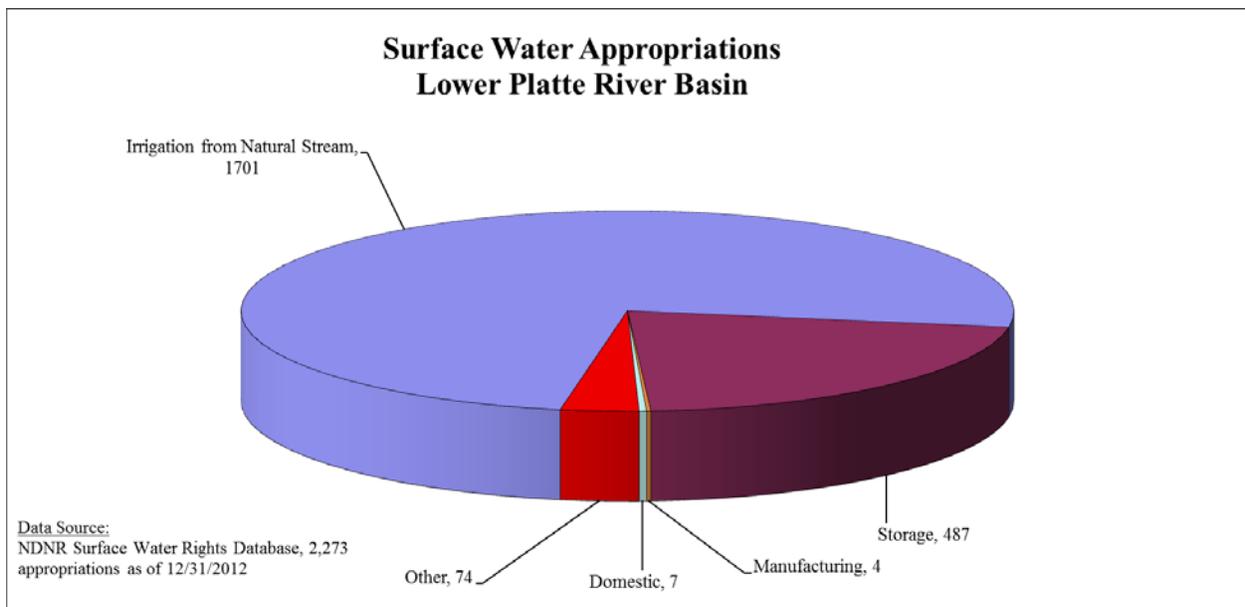


Figure 7-5. Surface water appropriations by number of diversion points, Lower Platte River Basin.

Surface Water Diversions LOWER PLATTE RIVER SURFACE WATER BASIN

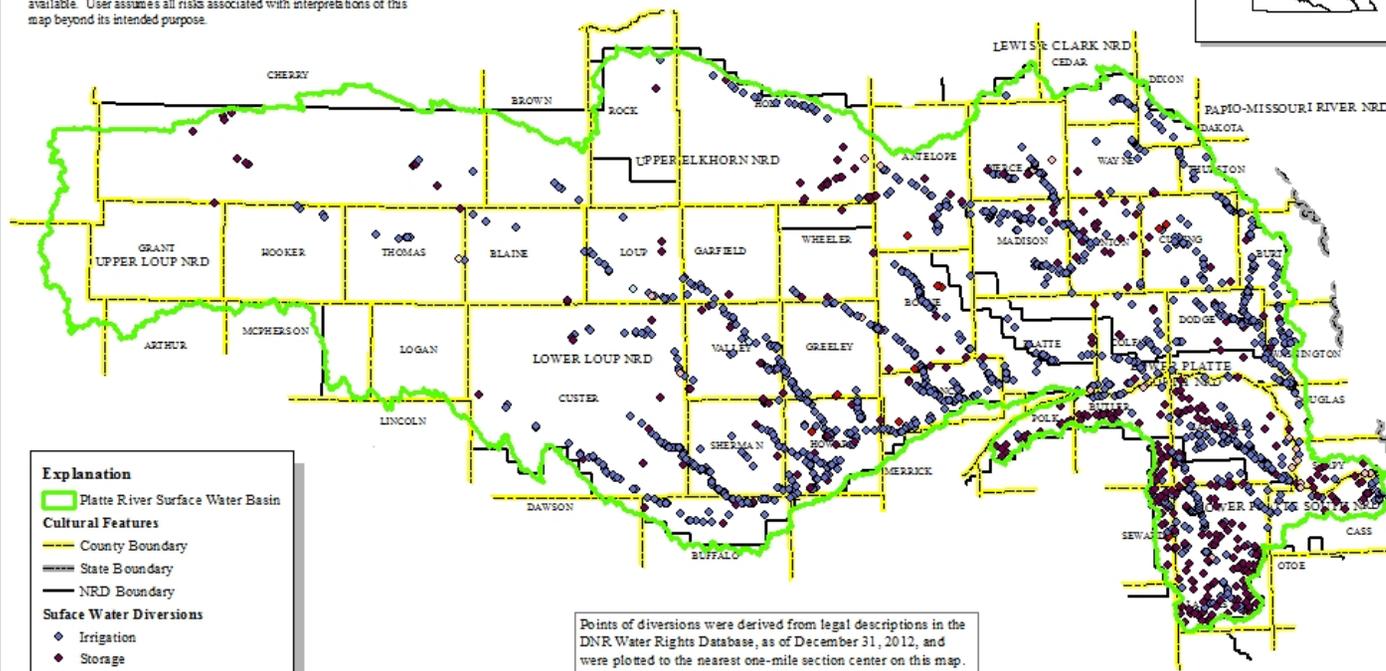

This map is intended to supply only general information concerning the matter stated in its title. Boundaries and the location of features portrayed on this map are not to be construed as legal boundaries or actual locations, and may change as additional or better data become available. User assumes all risks associated with interpretations of this map beyond its intended purpose.



- Explanation**
- ▭ Platte River Surface Water Basin
 - Cultural Features**
 - County Boundary
 - State Boundary
 - NRD Boundary
 - Surface Water Diversions**
 - ◆ Irrigation
 - ◆ Storage
 - ◇ Manufacturing
 - ◇ Incidental Underground Storage
 - ◆ Waste Storage
 - ◇ Other

Points of diversions were derived from legal descriptions in the DNR Water Rights Database, as of December 31, 2012, and were plotted to the nearest one-mile section center on this map.



Base map produced by Kevin Schwartman, April 27, 2006
 Base map approved June 1, 2006
 Surface water diversion map produced by Kevin Schwartman, December 9, 2013

Figure 7-6. Surface water appropriation diversion locations, Lower Platte River Basin.

7.4 Hydrologically Connected Area

The Central NEbraska Model (CENEB) was used to determine the extent of the 10/50 area for the Loup Basin and portions of the Elkhorn Basin. In areas that were not covered by the CENEB but were considered to be hydrologically connected, the 10/50 area was determined using stream depletion factor (SDF) methodology. Figure 7-7 specifies the extent of the 10/50 area. A description of the SDF methodology used appears in the “Methodology” section of this report.





Planning and Assistance Division

Map of Geographic Area within which Surface Water and Ground Water Are Hydrologically Connected For Purposes of the Determination of Fully Appropriated LOWER PLATTE RIVER SURFACE WATER BASIN



This map is intended to supply only general information concerning the matter stated in its title. Boundaries and the location of features portrayed on this map are not to be construed as legal boundaries or actual locations, and may change as additional or better data become available. User assumes all risks associated with interpretations of this map beyond its intended purpose.

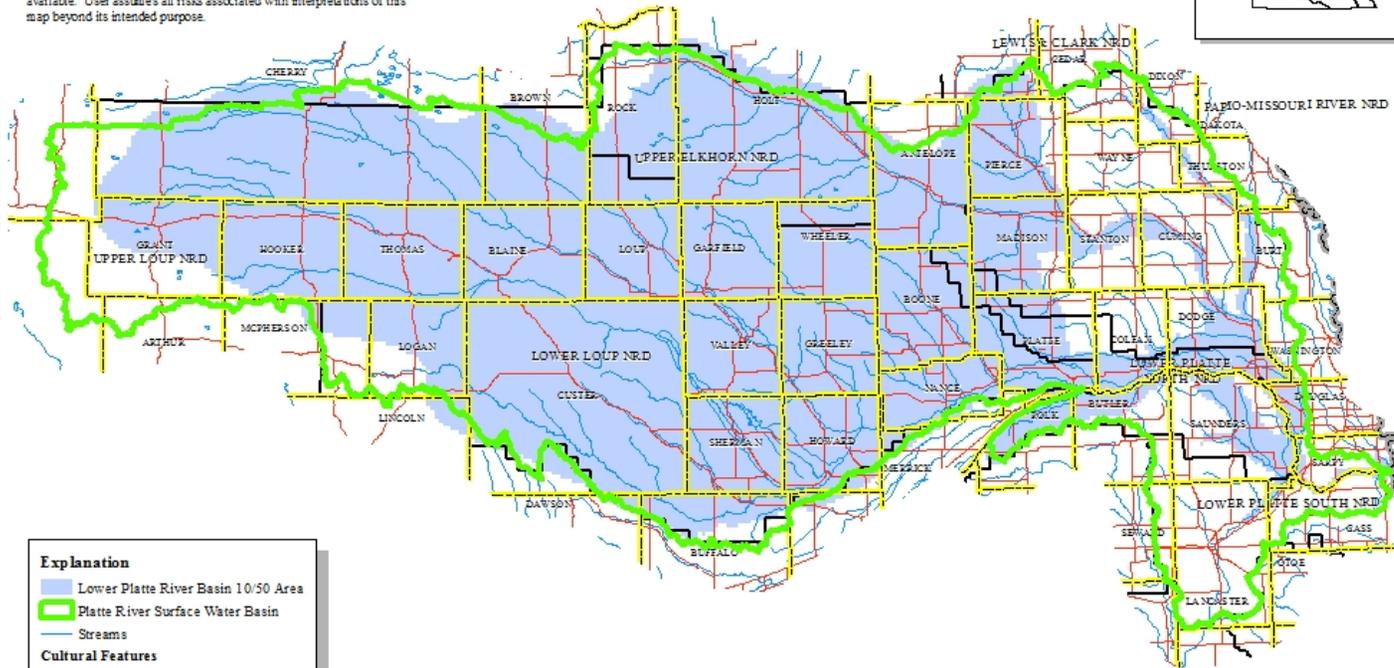

Explanation

- Lower Platte River Basin 10/50 Area
- Platte River Surface Water Basin
- Streams

Cultural Features

- County Boundary
- State Boundary
- NRD Boundary
- Highways



Base map produced by Kevin Schwartzman, April 27, 2006
Base map approved June 1, 2006
Surface water diversion map produced by Kevin Schwartzman, December 10, 2013

Figure 7-7. 10/50 area, Lower Platte River Basin.

7.5 Net Corn Crop Irrigation Requirement

Figure 7-8 is a map of the net corn crop irrigation requirement (NCCIR) for the Lower Platte River Basin (DNR, 2005). The NCCIR for a junior surface water appropriation above the North Bend gage is 10.52 inches. To assess the number of days required to be available for diversion, a surface water diversion rate equal to one cfs per 70 acres, a downtime of 10 percent and an irrigation efficiency of 80 percent were assumed. Based on these assumptions, the most junior surface water appropriations would need 27.9 days annually to divert 65 percent of the NCCIR and 36.5 days to divert 85 percent of the NCCIR.





Planning and Assistance Division

Net Corn Crop Irrigation Requirement LOWER PLATTE RIVER SURFACE WATER BASIN



This map is intended to supply only general information concerning the matter stated in its title. Boundaries and the location of features portrayed on this map are not to be construed as legal boundaries or actual locations, and may change as additional or better data become available. User assumes all risks associated with interpretations of this map beyond its intended purpose.

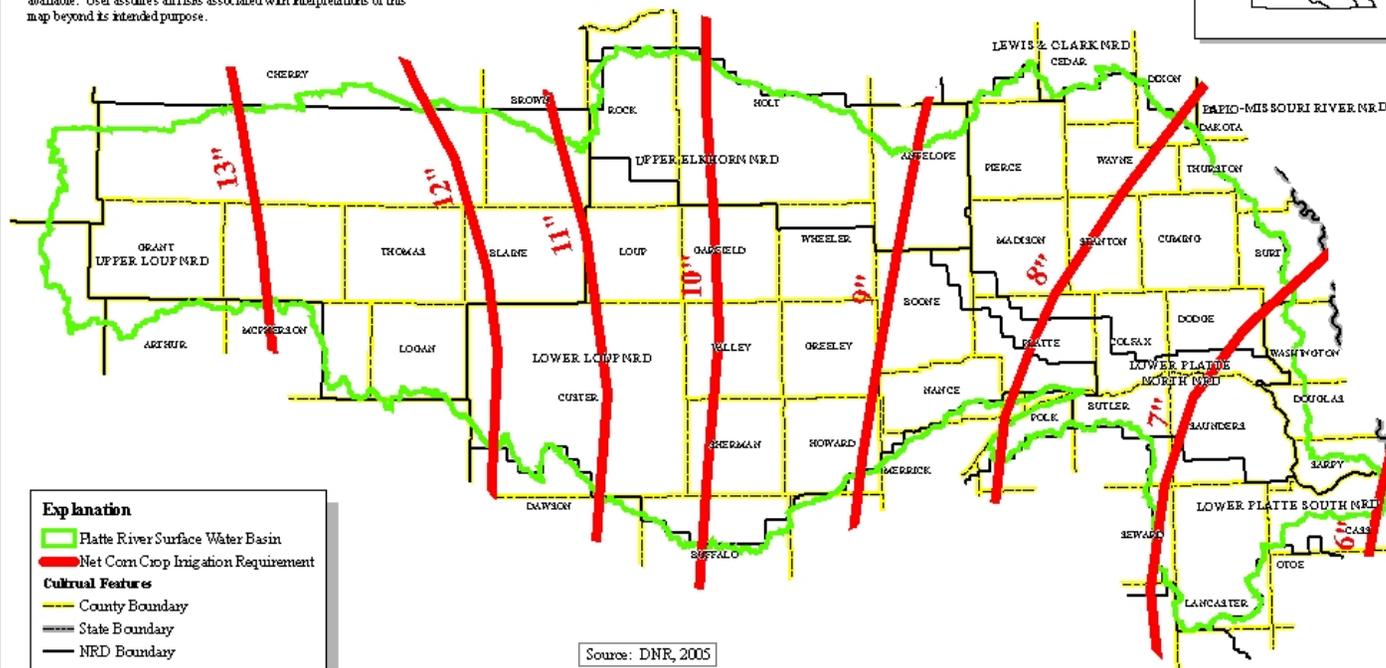

Explanation

- Platte River Surface Water Basin
- Net Corn Crop Irrigation Requirement

Cultural Features

- County Boundary
- State Boundary
- NRD Boundary

Source: DNR, 2005



Base map produced by Kevin Schwartzman, April 27, 2006
Base map approved June 1, 2006
Corn irrigation requirement map produced by Kevin Schwartzman June 5, 2006

Figure 7-8. Net corn crop irrigation requirement, Lower Platte River Basin.

7.6 7.6 Surface Water Closing Records

Tables 7-1 and 7-2 record all surface water administration that has occurred in the basin upstream of the North Bend and Louisville gages, respectively, between 1993 and 2012.

Table 7-1. Surface water administration in the Lower Platte River Basin upstream of the North Bend gage, 1993-2012.

Year	Water Body	Days	Closing Date	Opening Date
2000	Lower Platte River Basin above North Bend	53	Aug 8	Sep 30
2001	Lower Platte River Basin above North Bend	11	Aug 7	Aug 18
2002	Lower Platte River Basin above North Bend	6	Jun 6	Jun 12
2002	Lower Platte River Basin above North Bend	67	Jun 25	Aug 31
2002	Lower Platte River Basin above North Bend	24	Sep 6	Sep 30
2003	Lower Platte River Basin above North Bend	81	Jul 11	Sep 30
2004	Lower Platte River Basin above North Bend	13	May 6	May 19
2004	Lower Platte River Basin above North Bend	7	Jun 29	Jul 6
2004	Lower Platte River Basin above North Bend	58	Jul 27	Sep 23
2005	Lower Platte River Basin above North Bend	48	Jul 12	Aug 29
2005	Lower Platte River Basin above North Bend	28	Sep 2	Sep 30
2006	Lower Platte River Basin above North Bend	35	May 15	Jun 20
2006	Lower Platte River Basin above North Bend	45	Jun 26	Aug 10
2006	Lower Platte River Basin above North Bend	28	Aug 14	Sep 11
2006	Lower Platte River Basin above North Bend	22	Oct 5	Oct 27
2006	Lower Platte River Basin above North Bend	20	Oct 31	Nov 20
2007	Lower Platte River Basin above North Bend	5	July 9	July 14
2008	Lower Platte River Basin above North Bend	3	Aug 8	Aug 11
2008	Lower Platte River Basin above North Bend	4	Aug 25	Aug 29
2008	Lower Platte River Basin above North Bend	6	Sep 2	Sep 8
2012	Lower Platte River Basin above North Bend	172	June 15	Dec 4

Table 7-2. Surface water administration in the Lower Platte River Basin downstream of the North Bend gage and upstream of the Louisville gage 1993-2012.

Year	Water Body	Days	Closing Date	Opening Date
1990	Willow Creek	14	Aug 17	Aug 31
1991	Taylor Creek	4	Jul 30	Aug 3
1991	Taylor Creek	3	Aug 23	Aug 26
1991	Taylor Creek	7	Aug 28	Sep 4
1991	Union Creek	7	Aug 28	Sep 4
2000	Lower Platte River Basin above Louisville	53	Aug 8	Sep 30
2001	Lower Platte River Basin above Louisville	11	Aug 7	Aug 18
2002	Lower Platte River Basin above Louisville	6	Jun 6	Jun 12
2002	Lower Platte River Basin above Louisville	59	Jun 25	Aug 23
2002	Lower Platte River Basin above Louisville	4	Aug 27	Aug 31
2002	Lower Platte River Basin above Louisville	24	Sep 6	Sep 30
2003	Lower Platte River Basin above Louisville	66	Jul 14	Sep 18
2004	Lower Platte River Basin above Louisville	13	May 6	May 19
2004	Lower Platte River Basin above Louisville	7	Jun 29	Jul 6
2004	Lower Platte River Basin above Louisville	58	Jul 27	Sep 23
2005	Lower Platte River Basin above Louisville	14	Jul 12	Jul 26
2005	Lower Platte River Basin above Louisville	31	Jul 29	Aug 29
2005	Lower Platte River Basin above Louisville	28	Sep 2	Sep 30
2006	Lower Platte River Basin above Louisville	35	May 16	Jun 20
2006	Lower Platte River Basin above Louisville	45	Jun 26	Aug 10
2006	Lower Platte River Basin above Louisville	28	Aug 14	Sep 11
2006	Lower Platte River Basin above Louisville	22	Oct 5	Oct 27
2006	Lower Platte River Basin above Louisville	20	Oct 31	Nov 20
2007	Lower Platte River Basin above Louisville	5	July 9	July 14
2008	Lower Platte River Basin above Louisville	4	Aug 25	Aug 29
2008	Lower Platte River Basin above Louisville	6	Sep 2	Sep 8
2012	Lower Platte River Basin above Louisville	168	June 19	Dec 4

7.7 Evaluation of Current Development

7.7.1 Current Water Supply

The current water supply is estimated by using the previous 20 years (1993-2012) of flows and comparing them to the flows necessary to satisfy the senior surface water appropriation (i.e., the instream flow appropriations). The results of the analyses conducted for the Lower Platte River Basin upstream of North Bend, and also downstream of North Bend and upstream of Louisville, respectively, are shown in Tables 7-3 and 7-4. The results indicate that the current surface water supply in the Lower Platte River Basin upstream of North Bend provides an average of 38.8 days available for diversion between July 1 and August 31 and 114.7 days available for diversion

between May 1 and September 30 (Table 7-5). The results for the Lower Platte River Basin downstream of North Bend and upstream of Louisville indicate an average of 44.1 days available for diversion between July 1 and August 31 and 118.7 days available for diversion between May 1 and September 30 (Table 7-6).

Table 7-3. Estimate of the current number of days surface water is available for diversion upstream of North Bend.

Year	July 1 through August 31 Number of Days Surface Water is Available for Diversion	May 1 through September 30 Number of Days Surface Water is Available for Diversion
1993	62	153
1994	56	143
1995	52	134
1996	62	153
1997	40	131
1998	62	153
1999	61	152
2000	32	94
2001	28	111
2002	2	48
2003	6	72
2004	20	75
2005	10	71
2006	0	35
2007	49	140
2008	47	125
2009	62	153
2010	62	153
2011	62	153
2012	0	44
Average	38.8	114.7

Table 7-4. Estimate of the current number of days surface water is available for diversion downstream of North Bend and upstream of Louisville

Year	July 1 through August 31 Number of Days Surface Water is Available for Diversion	May 1 through September 30 Number of Days Surface Water is Available for Diversion
1993	62	153
1994	59	149
1995	53	144
1996	62	153
1997	43	134
1998	62	153
1999	62	153
2000	35	97
2001	34	118
2002	5	51
2003	11	77
2004	22	78
2005	12	73
2006	3	40
2007	51	142
2008	59	148
2009	62	153
2010	62	153
2011	62	153
2012	0	51
Average	41.1	118.7

Table 7-5. Comparison between the number of days required to meet the net corn crop irrigation requirement and number of days surface water is available for diversion upstream of North Bend.

	Number of Days Necessary to Meet the 65% and 85% of Net Corn Crop Irrigation Requirement	Average Number of Days Available for Diversion with Current Development
July 1 – August 31 (65% Requirement)	27.9	38.8 (10.9 days above the requirement)
May 1 – September 30 (85% Requirement)	36.5	114.7 (78.2 days above the requirement)

Table 7-6. Comparison between the number of days required to meet the net corn crop irrigation requirement and number of days surface water is available for diversion downstream of North Bend and upstream of Louisville.

	Number of Days Necessary to Meet the 65% and 85% of Net Corn Crop Irrigation Requirement	Average Number of Days Available for Diversion with Current Development
July 1 – August 31 (65% Requirement)	27.9	41.1 (13.2 days above the requirement)
May 1 – September 30 (85% Requirement)	36.5	118.7 (82.2 days above the requirement)

7.7.2 Water Supply

In order to complete the long-term evaluation of surface water supplies, a future 20-year water supply for the basin must be estimated. The basin's major water sources are precipitation, which runs off as direct streamflow and infiltrates into the ground to discharge as baseflow; groundwater movement into the basin, which discharges as baseflow; and streamflow from the middle Platte River. Using methodology published in the *Journal of Hydrology* (Wen and Chen, 2005), a nonparametric Mann-Kendall trend test of the weighted average precipitation in the basin was completed. The analysis showed no statistically significant trend in precipitation ($P > 0.95$) over the past 50 years (Figure 7-9). The same type of statistical analysis of streamflow from the middle Platte River (using the Platte River at Duncan gage as inflow to the Lower Platte Basin), also showed no statistically significant trend ($P > 0.95$) (Figure 7-10). Therefore, using the previous 20 years of precipitation and streamflow data as the best estimate of the future surface water supply is a reasonable starting point for applying the lag depletions from groundwater wells.

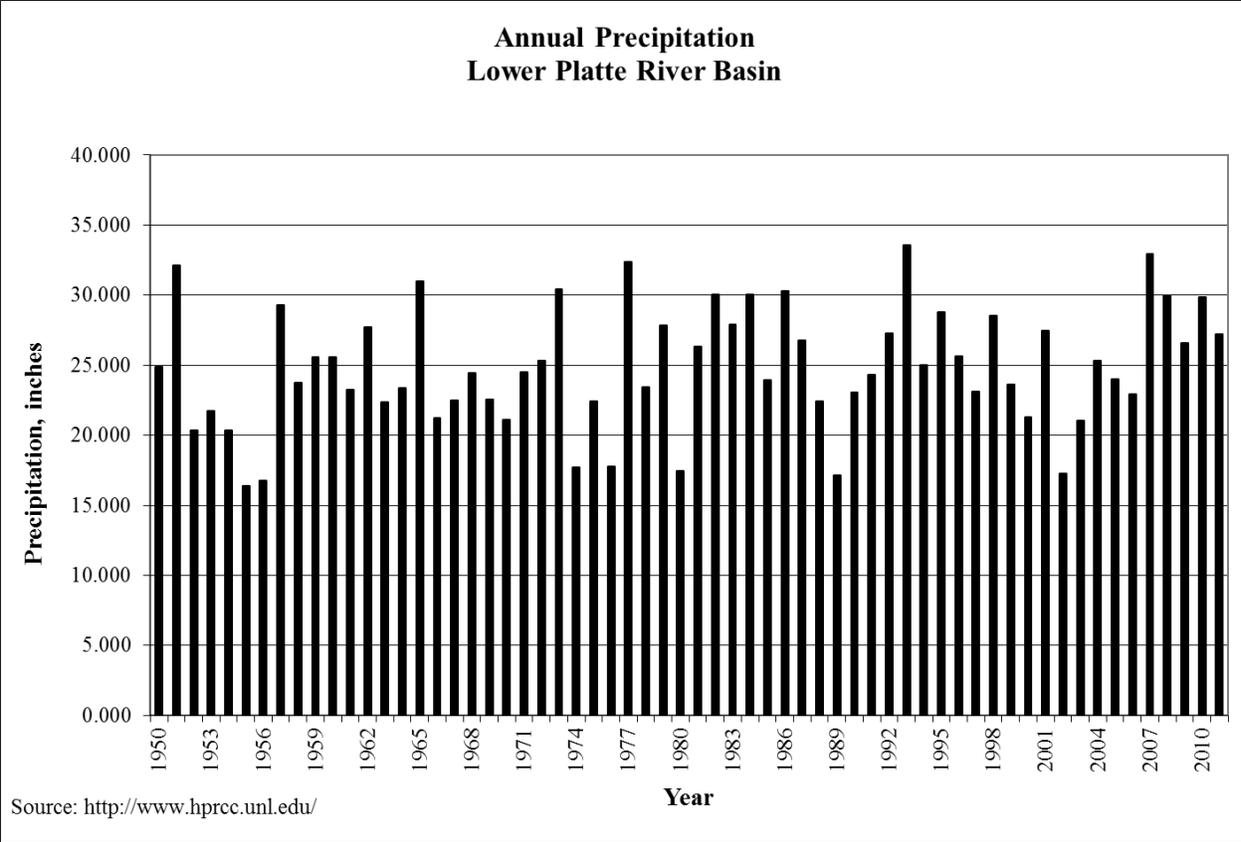


Figure 7-9. Annual precipitation, Lower Platte River Basin.¹

¹ The results include precipitation stations covering the Loup, Elkhorn, and Platte River Basins.

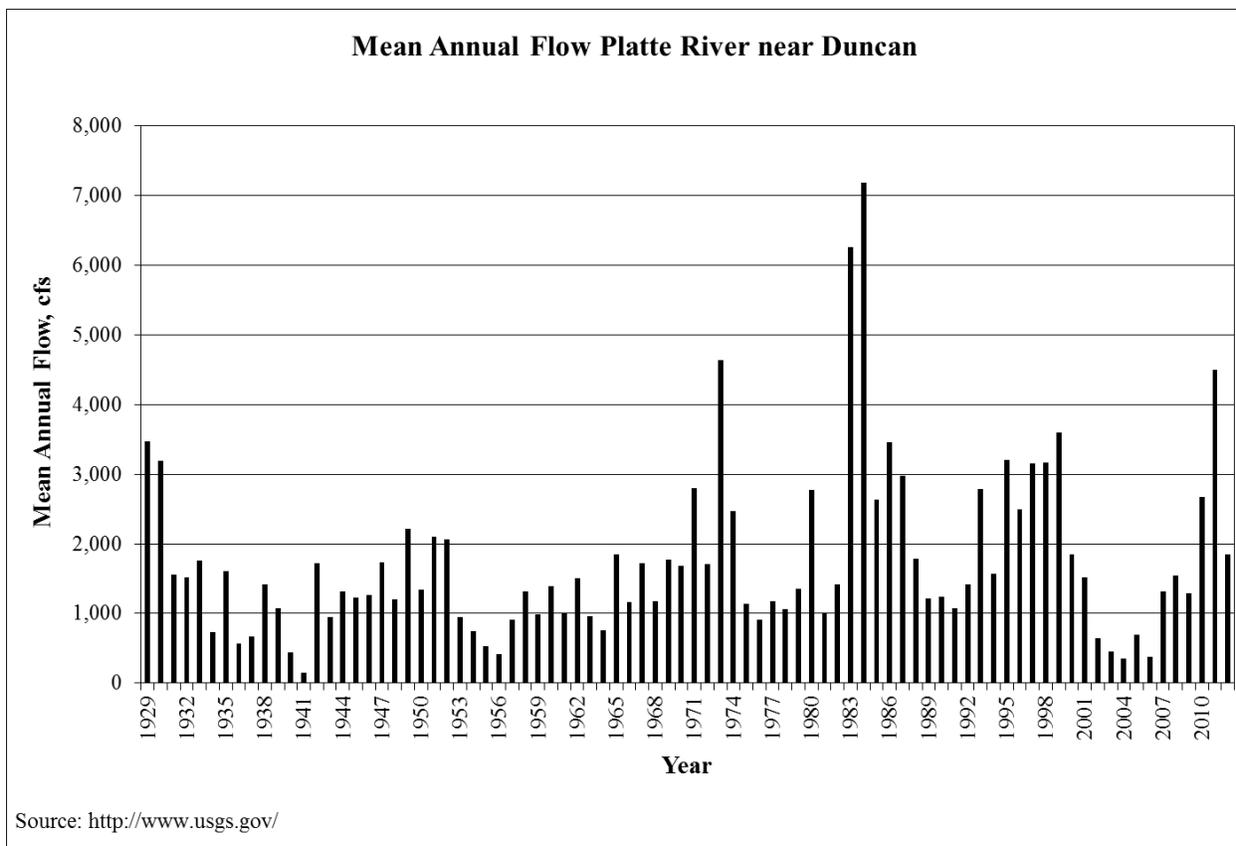


Figure 7-10. Mean annual flow, Platte River near Duncan.

7.7.3 Depletions Analysis

The future depletions due to current well development that could be expected to affect streamflow in the basin were estimated using the CENEB Model for the Loup Basin and portions of the Elkhorn Basin, whereas the SDF methodology was used in all other areas where data exist. The results estimate the future streamflow at North Bend to be depleted by 87 cfs in 25 years. The results estimate the future streamflow at Louisville to be depleted by 422 cfs in 25 years. The 422 cfs depletion at Louisville includes the 87 cfs at North Bend, 40 cfs calculated using the results of the CENEB Model for the Elkhorn River upstream of Norfolk, 14 cfs calculated using the Jenkins method for areas downstream of North Bend and downstream of Norfolk but upstream of the Louisville gage, 160 cfs² from the Metropolitan Utilities District’s Platte West well field, located on the Platte River upstream of the confluence of the Platte and Elkhorn

² This is the maximum amount of water that is permitted to be pumped from the stream by the well field, not the entire amount of streamflow for which the induced recharge permit was granted.

Rivers, and 121 cfs³ from the Lincoln Water System's well field, located on the Platte River near Ashland.

7.7.4 Evaluation of Current Levels of Development against Future Water Supplies

The estimates of the 20-year average number of days available for diversion are calculated by comparing the lag-adjusted future water supply with the flows necessary to satisfy the senior calling surface water appropriations (in this case, the instream flow rights) that have caused administration of junior appropriations in the basin. The results of the analyses are shown in Tables 7-7 and 7-8. The results of the analyses as compared to the numbers of days surface water is required to be available to divert 65 percent and 85 percent of the NCCIR are detailed in Tables 7-9 and 7-10. The long-term surface water supply estimates, given current levels of development, are sufficient to meet the needs of the most junior surface water appropriations for the Lower Platte River Basin upstream of North Bend.

³ This is the difference between the maximum amount of water permitted to be pumped from the stream by the well field and the best estimate of average July-August water currently being pumped from the stream by the well field.

Table 7-7. Estimate of days surface water is available for diversion upstream of North Bend with current development and 25-year lag impacts.

Year	July 1 through August 31 Number of Days Surface Water is Available for Diversion	May 1 through September 30 Number of Days Surface Water is Available for Diversion
1	62	153
2	50	135
3	51	133
4	61	152
5	38	129
6	61	150
7	61	152
8	26	87
9	21	95
10	1	43
11	5	71
12	16	65
13	6	67
14	0	32
15	41	132
16	42	118
17	60	151
18	62	153
19	62	153
20	0	42
Average	36.3	110.7

Table 7-8. Estimate of days surface water is available for diversion downstream of North Bend and upstream of Louisville with current development and 25-year lag impacts.

Year	July 1 through August 31 Number of Days Surface Water is Available for Diversion	May 1 through September 30 Number of Days Surface Water is Available for Diversion
1	62	153
2	53	141
3	52	140
4	61	152
5	42	133
6	62	151
7	62	153
8	31	92
9	27	102
10	4	46
11	8	74
12	17	66
13	7	68
14	2	34
15	43	134
16	49	135
17	61	152
18	62	153
19	62	153
20	0	46
Average	38.4	113.9

Table 7-9. Comparison between the number of days required to meet the net corn crop irrigation requirement and number of days surface water is available for diversion upstream of North Bend with current development and lag impacts.

	Number of Days Necessary to Meet the 65% and 85% of Net Corn Crop Irrigation Requirement	Average Number of Days Available for Diversion at Current Development with 25 Years of Lag Impacts
July 1 – August 31 (65% Requirement)	27.9	36.3 (8.4 days above the requirement)
May 1 – September 30 (85% Requirement)	36.5	110.7 (74.2 days above the requirement)

Table 7-10. Comparison between the number of days required to meet the net corn crop irrigation requirement and number of days surface water is available for diversion downstream of North Bend and upstream of Louisville with current development and lag impacts.

	Number of Days Necessary to Meet the 65% and 85% of Net Corn Crop Irrigation Requirement	Average Number of Days Available for Diversion at Current Development with 25 Years of Lag Impacts
July 1 – August 31 (65% Requirement)	27.9	38.4 (10.5 days above the requirement)
May 1 – September 30 (85% Requirement)	36.5	113.9 (77.4 days above the requirement)

7.8 Evaluation of Predicted Future Development

Estimates of the number of high capacity wells (wells pumping greater than 50 gpm) that would be completed over the next 25 years, if no new legal constraints on the construction of such wells were imposed, were calculated based on extrapolating the present-day rate of increase in well development into the future (Figure 7-11). The present-day rate of development is based on the linear trend of the previous 10 years of development. Based on the analysis of the past 10 years of development, the rate of increase in high capacity wells is estimated to be 277 wells per year in the basin.

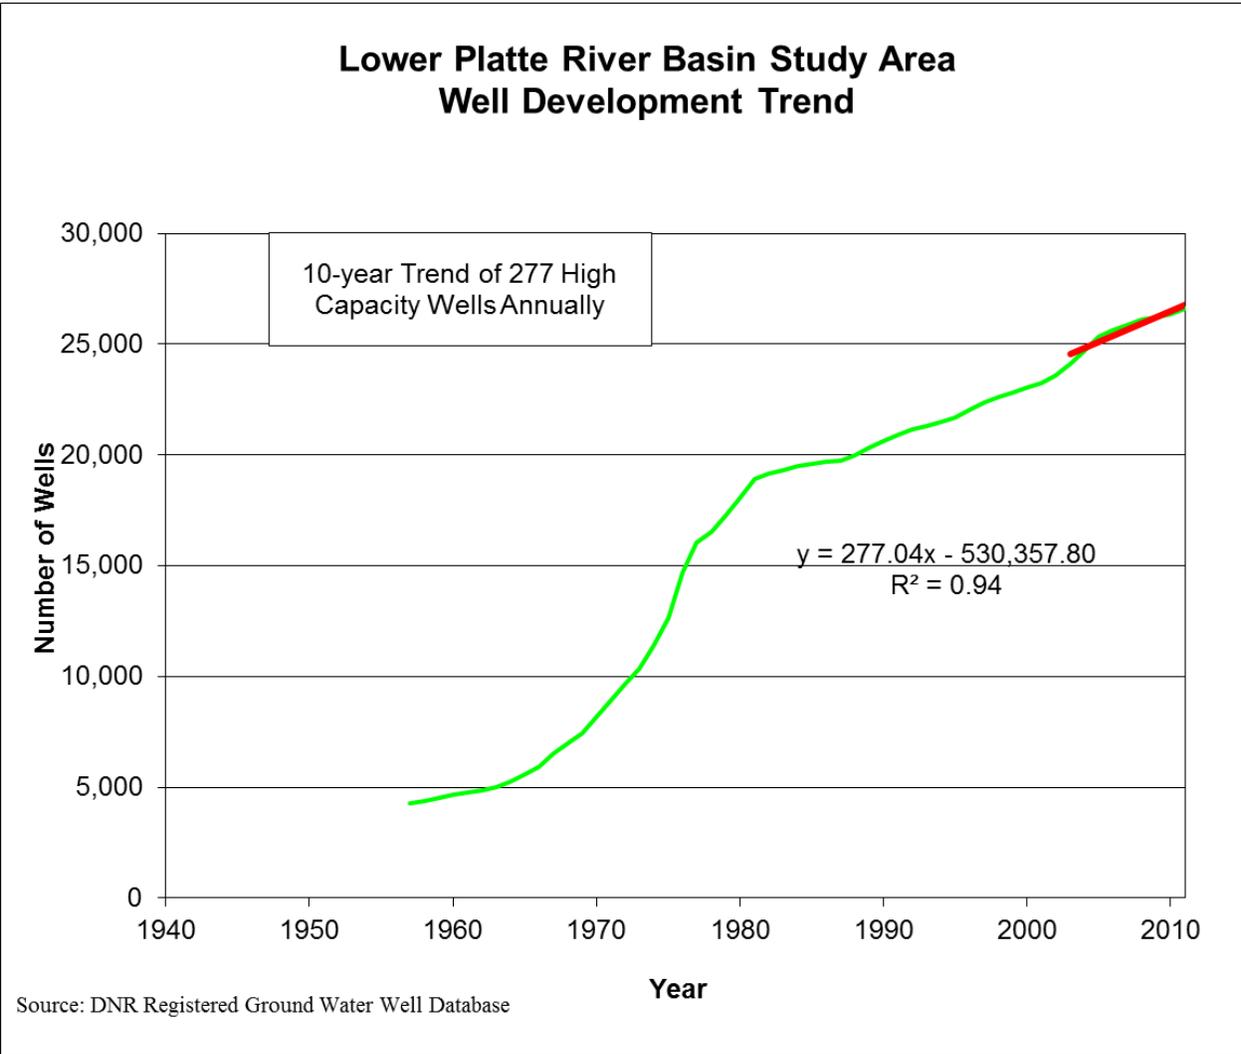


Figure 7-11. High capacity well development, Lower Platte River Basin

The future depletions due to current and future well development that could be expected to affect streamflow in the basin were estimated using the CENEb Model and the SDF methodology. The results estimate the future streamflow at North Bend to be depleted by 149 cfs in 25 years. This estimate includes the 87 cfs of lag from current levels of development and 62 cfs of depletion due to projected future irrigation development. The results estimate the future streamflow at Louisville to be depleted by 541 cfs in 25 years. This estimate includes the 422 cfs of lag depletion from current levels of development, 62 cfs of depletion due to projected future irrigation development upstream of North Bend and 57 cfs of depletion due to projected future irrigation development downstream of North Bend.

The estimate of the 20 year average number of days surface water is available for diversion with additional future development is calculated by comparing the future lag-adjusted flow with the flows necessary to satisfy the senior surface water appropriation. The results of the analyses are shown in Tables 7-11 and 7-12. The results of the analyses as compared to the numbers of days surface water is required to be available to divert 65 percent and 85 percent of the NCCIR are detailed in Tables 7-13 and 7-14. The results indicate that, based on current information, the Department's conclusion that the basin is not fully appropriated would not change if no additional constraints are placed on future development of surface water and groundwater in the basin.

Table 7-11. Estimated number of days surface water is available for diversion upstream of North Bend with current and predicted future development.

Year	July 1 through August 31 Number of Days Surface Water is Available for Diversion	May 1 through September 30 Number of Days Surface Water is Available for Diversion
1	62	153
2	49	131
3	49	130
4	61	152
5	38	129
6	61	145
7	61	152
8	21	82
9	16	90
10	1	42
11	4	69
12	16	62
13	6	67
14	0	31
15	39	130
16	41	115
17	59	150
18	62	153
19	62	153
20	0	42
Average	35.4	108.9

Table 7-12. Estimated number of days surface water is available for diversion downstream of North Bend and upstream of Louisville with current and predicted future development.

Year	July 1 through August 31 Number of Days Surface Water is Available for Diversion	May 1 through September 30 Number of Days Surface Water is Available for Diversion
1	62	153
2	51	138
3	50	136
4	61	152
5	42	133
6	62	146
7	62	153
8	27	88
9	22	97
10	4	45
11	6	71
12	17	63
13	7	68
14	2	34
15	39	130
16	48	133
17	61	152
18	62	153
19	62	153
20	0	45
Average	37.4	112.2

Table 7-13. Comparison between the number of days required to meet the net corn crop irrigation requirement and number of days surface water is available for diversion upstream of North Bend with current and predicted future development.

	Number of Days Necessary to Meet the 65% and 85% of Net Corn Crop Irrigation Requirement	Average Number of Days Available for Diversion with Future Development and 25 Years of Lag Impacts
July 1 – August 31 (65% Requirement)	27.9	35.4 (7.5 days above the requirement)
May 1 – September 30 (85% Requirement)	36.5	108.9 (72.4 days above the requirement)

Table 7-14. Comparison between the number of days required to meet the net corn crop irrigation requirement and number of days surface water is available for diversion downstream of North Bend and upstream of Louisville with current and predicted future development.

	Number of Days Necessary to Meet the 65% and 85% of Net Corn Crop Irrigation Requirement	Average Number of Days Available for Diversion with Future Development and 25 Years of Lag Impacts
July 1 – August 31 (65% Requirement)	27.9	37.4 (9.5 days above the requirement)
May 1 – September 30 (85% Requirement)	36.5	112.2 (75.7 days above the requirement)

7.9 Instream Flow Surface Water Appropriation Analysis

During the non-irrigation season, the junior water rights in the Lower Platte River system are the Nebraska Game and Parks Commission’s instream flow rights. The purpose of these rights is to maintain habitat for the fish community. Therefore, the Department determined that an appropriate standard of interference would be to determine whether the instream flow requirements that could be met at the time the water rights were granted can still be met today.

To calculate the average monthly flow that the instream flow permits could have expected at the time they were granted, the 20-year period prior to the permits being granted (1974-1993) was used. In conducting this analysis, the lag impacts were calculated for development through 1993 and subtracted from the daily flows (see Section 4.4.5 for more detail). The average number of days that flows were available for each month at the time the appropriations were obtained was compared with the current average number of days that flows are available for each month. The results are shown in Tables 7-15 and 7-16.

Results indicate that the North Bend instream flow appropriation would experience minor erosion after 25 years for the months of January (1.5 days) and March (1.2 days). The Louisville instream flow appropriation would experience minor erosion after 25 years for the months of March (0.6 days). The long-term surface water supply estimate in the basin is sufficient for the instream flow appropriations in the basin, based on the current level of development and the calculated 25 year lag impacts.

Table 7-15. Number of days North Bend instream flow appropriation expected to be met.

Month	Number of Days Flows Met at Time of Application ¹	Number of Days Flows Met With Current Development ²	Difference in the Number of Days Instream Flow Appropriation is Currently Met
October	16.7	21.6	4.9
November	21.8	22.9	1.1
December	20.2	21.8	1.6
January	22.5	21.0	-1.5
February	24.1	24.1	0.0
March	30.8	29.6	-1.2
April	28.5	29.4	0.9
May	27.5	27.6	0.1
June	23.3	24.5	1.2
July	13.9	16.5	2.6
August	12.7	13.1	0.4
September	14.9	16.1	1.3

Table 7-16. Number of days Louisville instream flow appropriation expected to be met.

Month	Number of Days Flows Met at Time of Application ⁴	Number of Days Flows Met With Current Development ⁵	Difference in the Number of Days Instream Flow Appropriation is Currently Met
October	16.7	22.1	5.4
November	21.9	23.4	1.5
December	20.5	24.1	3.7
January	22.8	25.5	2.7
February	24.2	24.9	0.8
March	30.8	30.2	-0.6
April	28.5	29.4	0.9
May	27.6	29.0	1.4
June	23.5	27.1	3.7
July	14.7	21.7	7.1
August	13.4	17.9	4.5
September	15.1	20.6	5.5

7.10 Sufficiency to Avoid Noncompliance

There are no interstate compacts or decrees, or other formal state contracts or agreements in the Lower Platte Basin that could be affected by reduced streamflows. There are state and federally endangered and threatened species in the Lower Platte River Basin. The requirements of the Nebraska Nongame and Endangered Species Conservation Act and the federal Endangered Species Act prevent actions that could cause harmful streamflow reductions. At this time, there is sufficient water supply in the basin to comply with NNECSA and the ESA. Because future development will be limited so as to continue compliance with NNECSA, the long-term surface water supply in the basin is sufficient.

⁴ The number of days instream flows would be expected to be met at the time of application (1974-1993) with lag effects of well development at the time of the appropriation

⁵ The number of days instream flows would be expected to be met at current time (1993-2012) with lag effects of current well development.

7.11 Current Studies being Conducted to Assist with Future Analysis

Three studies of note that are currently being conducted within the Lower Platte River Basin are the Eastern Nebraska Water Resources Assessment (ENWRA), the Elkhorn-Loup groundwater model (ELM) Phase III study, and the Department's work toward development of numerical groundwater models. ENWRA is an effort between several agencies to categorize the aquifer characteristics and the water supply of the glaciated portion of eastern Nebraska, which includes large areas of the Lower Platte River Basin. This work may provide data for use in future reports. The ELM study is working to further refine the Phase II groundwater model, which covers a substantial portion of the Lower Platte River Basin and which was utilized in part as a starting point for development of the Department's CENEBA Model. The Department will evaluate future results from this study and may utilize information from this study in future reports. The Department's work toward developing numerical groundwater models will follow on completion of an evaluation of available data sources and is planned to be completed in two years.

7.12 Relevant Data Provided by Interested Parties

The Department published a request for relevant data from interested parties for this year's evaluation on October 3, 2013 (see Appendix B for affidavit). The Department did not receive any such information.

7.13 Conclusions

Based on the analysis of the sufficiency of the long-term surface water supply in the Lower Platte River Basin, the Department has reached a conclusion that the Lower Platte River Basin upstream of the confluence with the Missouri River is presently not fully appropriated. Based on current information, the Department has also determined that if no additional legal constraints are imposed on future development of hydrologically connected surface water and groundwater and reasonable projections are made on the extent and location of future development, then this conclusion would not change to a conclusion that the basin is fully appropriated.

Bibliography of Hydrogeologic References for Lower Platte River Basin

Conservation and Survey Division. 2005. *Mapping of Aquifer Properties-Transmissivity and Specific Yield-for Selected River Basins in Central and Eastern Nebraska*. Lincoln.

Nebraska Department of Natural Resources. 2005. *2006 Annual Evaluation of Availability of Hydrologically Connected Water Supplies*. Lincoln.

Wen, F. J. and X. H. Chen, 2006. Evaluation of the impact of groundwater irrigation on streamflow depletion in Nebraska. *Journal of Hydrology* 327: 603-617.