
Classification of Dams

Dam Safety Section

Updated March 2013



Table of Contents

1.0	INTRODUCTION	1
1.1	Size Classifications.....	1
1.2	Hazard Classifications	2
1.3	Categories of Dams	2
2.0	DETERMINATION OF HAZARD CLASS	3
2.1	Future Development	3
2.2	Dams in Series	3
2.3	Breach Routings	3
2.31	Peak Breach Discharge	4
2.32	Reservoir Water Surface Elevation.....	5
2.33	Breach Hydrograph.....	6
2.34	Breach Development and Routing Methodologies	6
2.35	Coincidental Downstream Flooding	6

1.0 INTRODUCTION

The design, inspection, and maintenance criteria for a dam are based on its classification. In Nebraska, dams are classified by their size and their hazard potential. The size classification is determined by the height of the dam and its storage capacity. The hazard potential classification is determined by the damage that might occur to existing or future development should the dam suddenly release large quantities of water downstream due to a breach or misoperation of the dam. The size of a dam is only one of many factors that are taken into consideration when determining a dam's hazard potential classification.

1.1 Size Classifications

In Nebraska, the three size classifications for dams are small, intermediate, and large. Table 1 provides details for determining a dam's size classification.

Table 1. Dam Size Classification.

Size	Effective Height (feet) x Effective Storage (acre-feet)	Effective Height
Small	$\leq 3,000$ acre-feet ²	and ≤ 35 feet
Intermediate	$> 3,000$ acre-feet ² and $< 30,000$ acre-feet ²	or > 35 feet
Large	$\geq 30,000$ acre-feet ²	regardless of height

The effective height of a dam is defined as the difference in elevation in feet between the natural bed of the stream or watercourse measured at the downstream toe (or from the lowest elevation of the outside limit of the barrier if it is not across stream) to the auxiliary spillway crest. The effective storage is defined as the total storage volume in acre-feet in the reservoir below the elevation of the crest of the auxiliary spillway. If the dam does not have an auxiliary spillway, the effective height and effective storage should be measured at the top of dam elevation.

1.2 Hazard Classifications

The following hazard potential classifications have been established for dams in Nebraska:

- **Minimal Hazard Potential** - failure of the dam would likely result in no economic loss beyond the cost of the structure itself and losses principally limited to the owner's property.
- **Low Hazard Potential** - failure of the dam would result in no probable loss of human life and in low economic loss. Failure may damage storage buildings, agricultural land, and county roads.
- **Significant Hazard Potential** - failure or misoperation of the dam would result in no probable loss of human life but could result in major economic loss, environmental damage, or disruption of lifeline facilities. Failure may result in shallow flooding of homes and commercial buildings or damage to main highways, minor railroads, or important public utilities.
- **High Hazard Potential** - failure or misoperation of the dam resulting in loss of human life is probable. Failure may cause serious damage to homes, industrial or commercial buildings, four-lane highways, or major railroads. Failure may cause shallow flooding of hospitals, nursing homes, or schools.

The minimal hazard potential classification is generally limited to small size dams (defined in section 1.1) located in predominately rural or agricultural areas.

1.3 Categories of Dams

Dams in Nebraska are divided into two main categories based on their size and hazard potential. The two categories are farm pond dams and major dams. Farm pond dams include all dams that are of the small size classification and have either a minimal or low hazard potential. All other dams in the State are categorized as major dams.

2.0 DETERMINATION OF HAZARD CLASS

The dam's location and the depth of anticipated flooding downstream of a dam following its failure are the primary basis for determining its hazard potential class. In many cases, a dam's hazard potential class is readily apparent based on the dam's location and the presence of downstream development or the lack thereof. An engineer experienced in dam hazard potential classification may be able to determine the hazard class by touring the area downstream of the dam or simply reviewing readily available information such as aerial photographs and topographic information. In other cases, when the hazard potential classification is not readily apparent, hydraulic breach routings may be required.

2.1 Future Development

The potential for future development must be taken into consideration when determining the hazard potential class for a dam. Any dam located in close proximity to a city or village as detailed in Table 2 must be designed to meet the requirements for a high hazard potential structure. The design requirements can be adjusted if development in the downstream breach inundation area is sufficiently curtailed due to zoning restrictions, easements, deed restrictions, or other methods of restriction acceptable to the Department.

Table 2. High Hazard Potential Based on Proximity to City or Village

Incorporated Class	Population	Located within or within given distance of jurisdictional limits of City or Village
Metropolitan Class	$\geq 300,000$	3 miles
Primary Class	> 100,000 up to 300,000	3 miles
First Class	> 5,000 up to 100,000	2 miles
Second Class	> 800 up to 5,000	1 mile
Village	100 up to 800	1 mile

2.2 Dams in Series

If failure of an upper dam could contribute to the failure of a lower dam, the upper dam must have a hazard classification that is equal to or higher than the hazard classification for the lower dam.

2.3 Breach Routings

Breach routings are used to help delineate the area downstream of a dam potentially impacted by inundation should that dam fail and can be used in determining the dam's hazard potential. Breach routings used in conjunction with survey and topographic data

can be used to determine the anticipated depth of flooding at specific structures or facilities. Table 3 includes guidance for determining the hazard potential classification for a dam based on specific downstream structures and facilities.

2.31 Peak Breach Discharge

The minimum peak discharge of the breach hydrograph, regardless of the technique used to analyze the downstream inundation area, shall be determined using the criteria detailed in *Natural Resources Conservation Service (NRCS) Technical Release Number 60 (TR-60)* and repeated here for convenience:

1. For depth of water at the dam at the time of failure where $H_w \geq 103$ ft

$$Q_{\max} = (65)H_w^{1.85}$$

2. For depth of water at the dam at the time of failure where $H_w < 103$ ft

$$Q_{\max} = (1,100)B_r^{1.35} \text{ where}$$

$$B_r = \frac{(V_s)(H_w)}{A}$$

but not less than $Q_{\max} = (3.2)H_w^{2.5}$ nor more than $Q_{\max} = (65)H_w^{1.85}$

3. When the width of the valley, L , at the water surface elevation corresponding to the depth, H_w , is less than,

$$T = \frac{(65)H_w^{0.35}}{0.416}$$

replace the equation, $Q_{\max} = (65)H_w^{1.85}$, in 1 and 2 above with,

$$Q_{\max} = (0.416)(L)H_w^{1.5}$$

where:

Q_{\max} = the peak breach discharge, ft^3/sec

B_r = breach factor, acre

V_s = reservoir storage at the time of failure, acre ft

H_w = depth of water at the dam, ft, calculated as the reservoir water surface elevation at the time of failure minus the elevation of the valley floor

A = cross-sectional area of embankment at the assumed location of breach, usually the template section (normal to the dam longitudinal axis) at the valley floor elevation, ft^2

T = theoretical breach width at the water surface elevation corresponding to the depth, H_w , for the equation, $Q_{\max} = (65)H_w^{1.85}$, ft

L = width of the valley at the water surface elevation corresponding to the depth, H_w , ft

The elevation of the valley floor is typically taken as the average elevation of the floodplain or the elevation of the top of the channel banks along the downstream toe of the dam as illustrated in Figure 1. A lower elevation for the valley floor should be considered if the breach flow is mostly contained within the channel downstream of the dam.

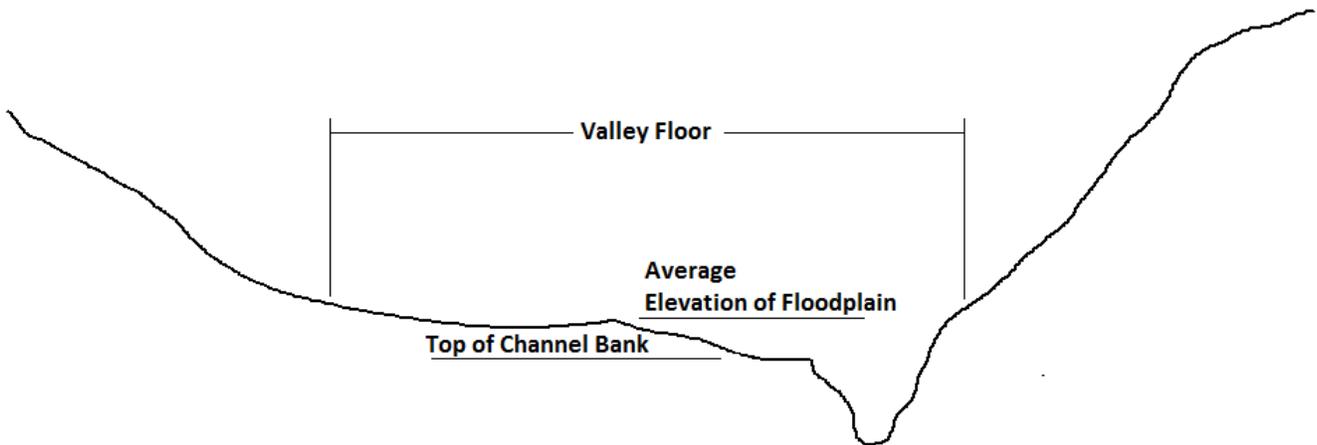


Figure 1. Typical Valley Cross Section at Downstream Toe of Dam.

2.32 Reservoir Water Surface Elevation

When determining the hazard potential class for a dam, the elevation of the reservoir water surface at the time of failure should correspond to the peak reservoir elevation during the routing of the 100-year flood; however, the water surface elevation at the time of failure should never be below the crest of the auxiliary spillway, or below the top of the dam if the dam does not have an auxiliary spillway.

2.33 Breach Hydrograph

The peak breach discharge and the storage volume at the time of failure can be utilized to develop a breach hydrograph using the following equation from *NRCS Technical Release Number 66 (TR-66)*:

$$Q_i = Q_{\max} e^{-t^*}$$

where:

Q_i = particular discharge at any given time, cfs

Q_{\max} = peak breach discharge, cfs

$$t^* = t \frac{Q_{\max}}{V_I}$$

t = time, seconds

V_I = storage volume in reservoir at time of breach, ft^3

2.34 Breach Development and Routing Methodologies

A peak discharge value and breach hydrograph determined using principles of erosion, hydraulics, and sediment transport may be used in lieu of the peak discharge and hydrograph computed using the above equations. The criteria, methodologies, and computer programs developed by the U.S. Army Corps of Engineers, the U.S. Bureau of Reclamation, the National Weather Service, and the NRCS for simulating a hypothetical dam failure and downstream flooding are generally acceptable.

2.35 Coincidental Downstream Flooding

Coincidental flooding downstream of the dam is not taken into consideration when determining the hazard potential classification. The flow in the outlet channel prior to failure should only include the discharge from the dam corresponding to the reservoir water surface elevation at the time of failure.

TABLE 3 - POTENTIAL HAZARDS FOR DAM CLASSIFICATION

This table gives general definitions of properties and damage that provide guidance in evaluating hazards. These definitions are to be used with sound judgment with the particular site conditions and damage potential.

Damage to:	Hazard Potential Classification			
	Minimal ¹	Low	Significant	High
LOSS OF LIFE	No	No	No	Yes
ROADS Interstate highways or 4-lane main highways.	No flow over road.	No flow over road.	Depth of flow < 2 feet over road.	Depth of flow ≥ 2 feet over road.
Paved State and Federal Highways.	No flow over road.	Depth of flow < 2 feet over road.	Depth of flow ≥ 2 feet over road.	
Paved County Roads and all unpaved roads.	No flow over road.	Flow over road.		
RAILROADS Main rail line – more frequent use than once per day.	No flow over rail bed.	No flow over rail bed	Depth of flow < 2 feet over rail bed.	Depth of flow ≥ 2 feet over rail bed.
Minor rail line – less frequent use than once per day.	No flow over rail bed.	Depth of flow < 2 feet.	Depth of flow ≥ 2 feet.	
BUILDINGS Farm Farm buildings not occupied by people or having potential for occupancy.	Depth of flow below lowest foundation ground line.	Flow above lowest foundation line. Damage may occur when depth of flow > 3 feet and DV > 15.		
Homes Single family residence, apartments, motel, hotel, etc.	Depth of flow below lowest foundation ground line.	Depth of flow below lowest foundation ground line.	Depth of flow at lowest foundation ground line.	Depth of flow ≥ 1 foot depth above lowest egress point (window or door) for living quarters.
Institutions Schools, hospitals, nursing homes, library, etc.	Depth of flow below lowest foundation ground line.	Depth of flow < 1 foot above lowest foundation ground line.	Depth of flow ≥ 1 foot above lowest foundation ground line	Flow above first floor.
Industrial and Commercial	Depth of flow below lowest foundation ground line.	Low to moderate damage to contents of buildings or depth of flow < 1 foot above first floor.	High dollar damage to contents of building or depth of flow above first floor 1 – 3 feet.	Serious damage to structure or depth of flow above first floor ≥ 3 feet or DV ≥ 15.
UTILITIES Power generation facilities, important interstate and intrastate power and communication lines, etc.			Damage may occur when buried lines can be exposed by erosion and when towers, poles and above ground lines can be damaged by undermining or debris produced from the flood plain.	Flow above first floor of generation facilities or interruption of service for more than 1 day.
ENVIRONMENTAL LOSSES Includes historical and cultural.			Major mitigation required.	Extensive mitigation cost or impossible to mitigate.

D = flow depth (ft.) V = flow velocity (ft./sec.)

¹Minimal hazard potential classification is generally limited to farm pond dams.